


LinkPoint® AIO

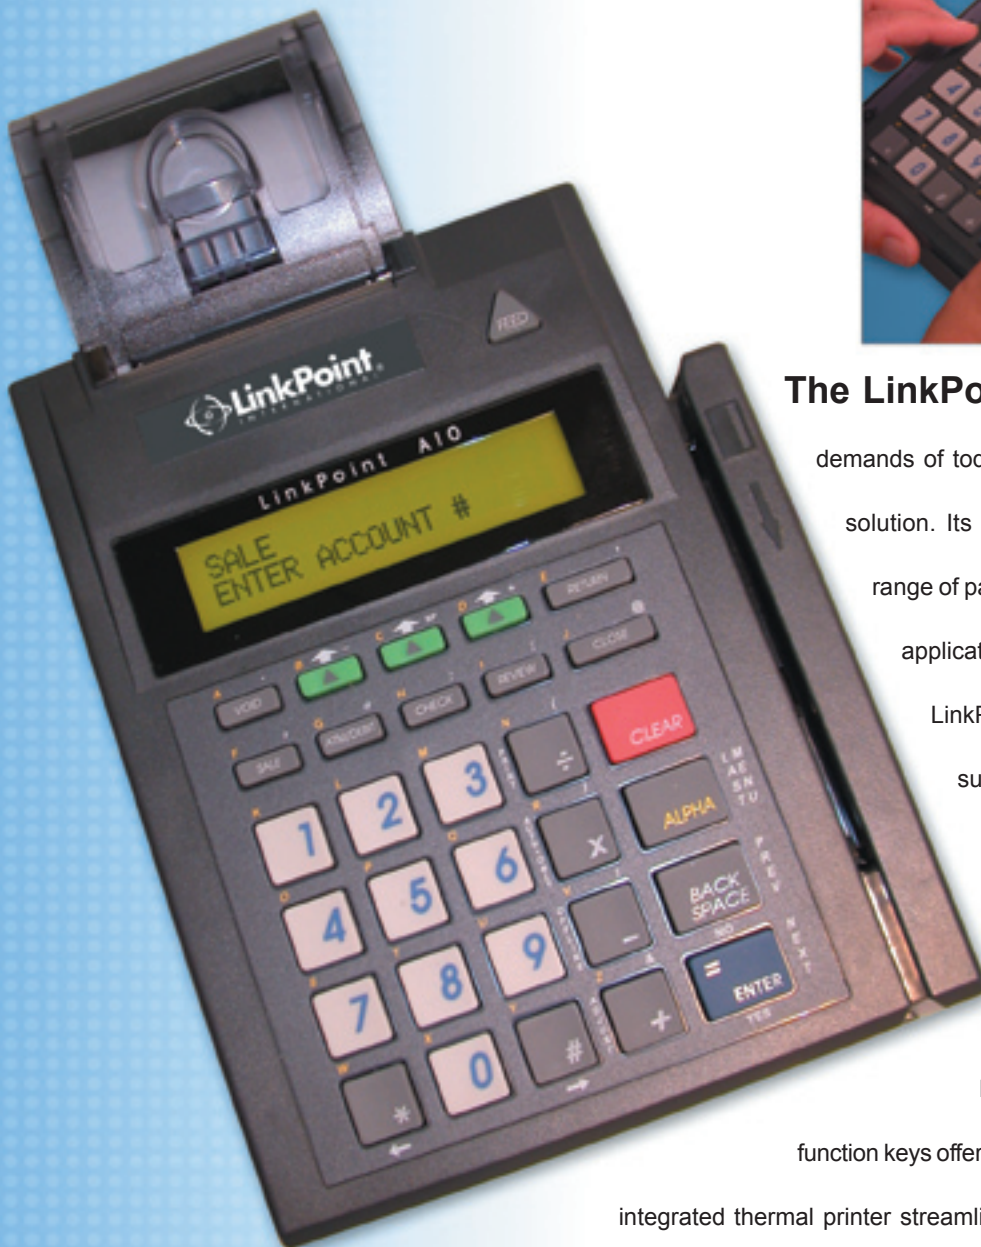

The LinkPoint AIO supports the complex processing demands of today's merchants with a sophisticated all-in-one solution. Its state-of-the-art technology addresses the full range of payment capabilities, including multiple merchant applications and identifications. The high-performance LinkPoint AIO delivers quick transaction times and superior reliability to merchants' customers—all at an affordable price.

An intuitive ATM-style interface makes the LinkPoint AIO easy to learn and easy to use.


Its screen-addressable keys and dedicated

function keys offer more selections with fewer steps. Its high-speed,

integrated thermal printer streamlines sales, installation and everyday merchant

operation. Compatible with many industry-standard peripherals, the LinkPoint AIO provides maximum

versatility at the merchant site.



Superior Reliability

- Reduces long-term merchant support expenses
- 12-month warranty provides peace of mind

Unbeatable Performance

- Fast, secure processing keeps pace with merchants' transaction needs
- Supports all payment processing methods—credit, debit, checks, loyalty programs, etc.
- Print speed of 14 lines per second provides quick, legible receipts

Maximum Merchant Efficiency

- Intuitive ATM-style interface makes learning a snap
- Clearly labeled, dedicated function keys simplify everyday operations
- Screen-addressable keys provide more selections with fewer steps
- Two-line display is easy to read in all lighting conditions
- Reliable printer with drop-in paper-loading system is quick and hassle-free

Versatility at the Merchant Site

- Supports multiple applications, languages and multiple merchant identifications
- Calculator function provides added-value module
- Compatible with many industry-standard peripherals (PIN pads, check readers, etc.)

Compact Design

- Small footprint with base or wall mounting saves valuable counterspace
- A single power supply reduces cable clutter

Advanced Fraud Prevention

- Password protection prevents unauthorized downloads
- Manager password controls ensure transaction security

Specifications

- **Terminal:** Memory: 1 MB total; 512K battery-backed RAM; 512K flash. Operating system embedded in flash sector. Microprocessor: Z180 CPU. Display: 2-line, 20-character backlit. LCD Keypad: 30 alphanumeric keys.
- **Screen:** Two-line, 20-character backlit LCD.
- **Card reader:** track 1 and track 2, bidirectional; track 1, 2 and 3 reader available upon special order.
- **Peripheral Ports:** 6-pin DIN port for PIN pads, smart-card readers or bar-code wands 8-pin DIN RS-232 general-purpose port for check readers, etc.
- **Printer:** Fixed thermal print head Easy, drop-in paper-loading system Speed: 14 lines per second. Paper: standard 2 1/4 in. (58 mm) thermal roll, single ply Appleton 1012 sheet (recommended). Paper roll diameter: 1.9 in. (48 mm) maximum. Open-cover/paper-out sensor. Graphic printing capability. 13 international character sets. Mechanical life: 15 million lines.
- **Communications:** Modem: standard asynchronous/synchronous; 300/1,200/2,400 bps standard Bell 103/212A, V.22 BIS. Telco: Standard RJ-11 modular jacks (2) located on base of unit
- **Physical:** 3.16 in. (80.32 mm) H X 5.86 in. (149 mm) W X 9.66 in. (244 mm) L, 1.25 lb. (0.54 kg). Net weight (terminal only): 1.51 lb. (0.68 kg). Net shipping weight (including power adapter): 3.4 lb. (1.54 kg).
- **Power:** 100-240 VAC, 50/60 Hz .8A (switching power supply) Power consumption: 350 mA, off hook, 2A during printing. Power adapter output: 7.5 VDC, 3 A (22.5W).
- **Environmental:** Storage temperature: 32° to 104°F (0° to 40°C) Operating humidity: 10% to 90%; noncondensing.